




## Dimensions



**eItron.**


Eltron Sales P/L  
5 Phillips Street  
Thebarton SA 5031  
P. 08 8234 1207  
F. 08 8234 1206

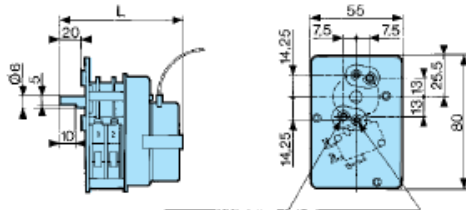

88 256 4 : L = 72 mm

## Faceplate Template 69mm x 99mm


## Wiring



- 1 Red
- 2 Blue
- 3 White


← Cable colours.  
Insulate end of cable not used

2 poles




Connect supply to motor via the red cam and the unit to be run via white cam

2 poles



1 = Red Cam  
2 = White Cam

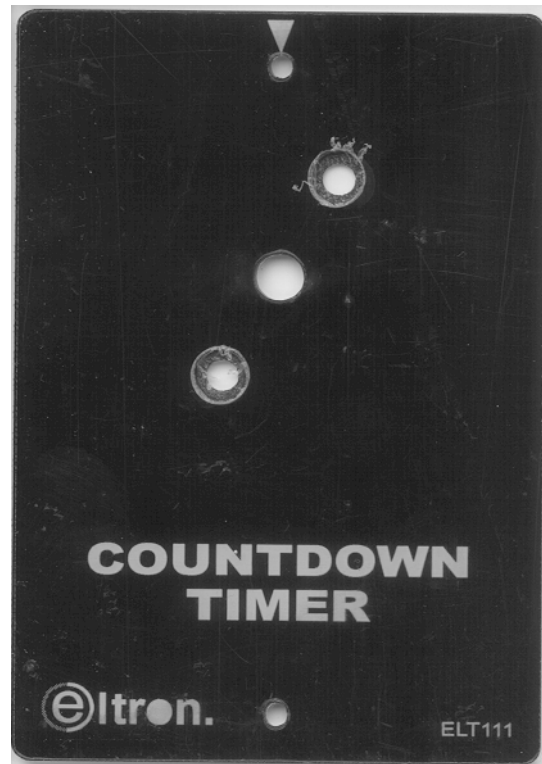

## Technical Data

### General characteristics

<b>Precision</b>	
Precision limit error	± 4 %
<b>Output specification</b>	
Timed two-pole	1 or 2 or 3
Thermal rating	20 A
Mechanical life (operations)	> 10 <sup>7</sup>
Rating (cos φ = 0.41) 10 <sup>4</sup> operations	16 A - 230 V
<b>Function and use</b>	
Voltage variation at maximum temperature of 55 °C according to IEC 255 100	+10 % -15 % Un
Absorbed power--motor	3.1 VA cos φ 0.8
Operator factor	100 %
Temperatures limits use (°C)	-5→ +70
Temperature limits stored (°C)	-40→ +80
Environmental protection Protected metal components - Insulated motor coil	*
Vibration withstand on 3 axes (Veritas standard)	4 G - 55 Hz
Dielectric test voltage according to IEC 255-5 or VDE 0435	1000 V - Un ≤ 60 V
Insulation according to standard VDE 0110 group C	380 V AC, 440 V DC
Protection : terminal	IP10
Operating position- any	*
Connection : Tags	6.35
Connection : Motor leads	250 mm
Mounting by screw	2 x M3 - 2 x M4
Weight (g)	225 / 245